


Product: In-line Check Valve

Models: 340-000/001, 1/2" [13mm] Barb OEM/Aftermarket

**Caution: Do not use for Water Heaters**

Technical Specifications

Cracking Pressure: 1 psi [ .1 bar ]  
Max. Pressure: 100 psi [ 6.9 bar ]  
Overall Dimensions: 4-1/4" x 1-5/8" [ 108 mm x 42 mm ]  
Temperature Limits: 34°F - 120°F [ 1°C - 49°C ]  
Fitting Configuration: 1/2" x 1" [ 13 x 25mm ] Straight Barb  
Materials: Nylon, EPDM. All materials are NSF Listed.

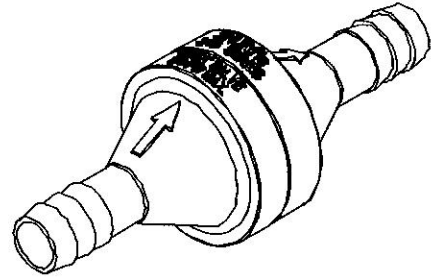

Installation

1. Arrow on body must be pointed in the same direction as the flow.
2. Do not use with fluids that contain particulate matter.
3. Be sure connections are secured with properly sized hose clamps.
4. Make sure all connections are in accordance with application.
5. Check for leaks after installation.



***SHURflo reserves the right to update specifications, prices, or make substitution***

**SHURflo, LLC Headquarters**  
5900 Katella Ave.  
Cypress, CA 90630  
Phone (562) 795-5200 Toll Free(800) 854-3218  
FAX (562) 795-7554

**SHURflo, LLC East**  
52748 Park Six Court  
Elkhart, IN 46514-5427  
Phone (562) 795-5200 Toll Free (800) 854-3218  
FAX (574) 264-2169  
© 1999 All rights reserved

**SHURflo Europe, Middle East, Africa**  
**Pentair Water Belgium bvba,**  
Industriepark Wolfstee, Toekomstlaan 30  
B-2200 Herentals, Belgium  
Phone +32-14-283500 Fax +32-14-283505